

# Kiwi Syslog™ Web Access

© 2015 SolarWinds, Inc.

---



Copyright © 1995-2015 SolarWinds Worldwide, LLC. All rights reserved worldwide.

No part of this document may be reproduced by any means nor modified, decompiled, disassembled, published or distributed, in whole or in part, or translated to any electronic medium or other means without the written consent of SolarWinds. All right, title, and interest in and to the software and documentation are and shall remain the exclusive property of SolarWinds and its respective licensors.

SOLARWINDS DISCLAIMS ALL WARRANTIES, CONDITIONS OR OTHER TERMS, EXPRESS OR IMPLIED, STATUTORY OR OTHERWISE, ON SOFTWARE AND DOCUMENTATION FURNISHED HEREUNDER INCLUDING WITHOUT LIMITATION THE WARRANTIES OF DESIGN, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND NONINFRINGEMENT. IN NO EVENT SHALL SOLARWINDS, ITS SUPPLIERS, NOR ITS LICENSORS BE LIABLE FOR ANY DAMAGES, WHETHER ARISING IN TORT, CONTRACT OR ANY OTHER LEGAL THEORY EVEN IF SOLARWINDS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

The SOLARWINDS and SOLARWINDS & Design marks are the exclusive property of SolarWinds Worldwide, LLC and its affiliates, are registered with the U.S. Patent and Trademark Office, and may be registered or pending registration in other countries. All other SolarWinds trademarks, service marks, and logos may be common law marks, registered or pending registration in the United States or in other countries. All other trademarks mentioned herein are used for identification purposes only and may be or are trademarks or registered trademarks of their respective companies.

Version 1.6.0, revised 8/11/2015

# Table of Contents

<b>Part I Welcome</b>	<b>1</b>
1 What is Kiwi Syslog Web Access? .....	1
2 Configuration .....	1
<b>Part II End User License Agreement (EULA)</b>	<b>2</b>
1 Definitions .....	2
2 Grant of License .....	3
3 License Restrictions .....	3
<b>Part III Login Gateway</b>	<b>6</b>
1 Overview .....	7
2 Pass-through Authentication .....	7
3 AD Authentication .....	8
4 Enabling SSL .....	10
<b>Part IV Events</b>	<b>11</b>
1 Overview .....	11
2 Filtering Events .....	12
3 Events Grid .....	12
4 Event Highlighting .....	13
5 Find .....	13
6 Quick Filtering .....	14
7 Direct Link .....	15
8 Export to CSV .....	16
<b>Part V Filters</b>	<b>17</b>
1 Overview .....	18
2 Add a filter .....	18
3 Rename a filter .....	18
4 Import a filter .....	19
5 Export a filter .....	19
6 Delete a filter .....	20
7 Filter properties .....	21
<b>Part VI Highlighting</b>	<b>23</b>
1 Overview .....	23
2 Import highlighting .....	24

3 Export highlighting .....	25
<b>Part VII Settings</b>	<b>26</b>
1 Overview .....	26
<b>Part VIII Admin</b>	<b>27</b>
1 Overview .....	27
2 Add an account .....	28
3 Reset password .....	29
4 Delete account(s) .....	29
5 Database Maintenance .....	30
6 Website Configuration .....	30

# 1 Welcome

Welcome to the Kiwi Syslog Web Access help file documentation.

Hopefully you will find the necessary help or assistance you require within these pages. If however you do not find what you are looking for, then please search the SolarWinds [Thwack](#) forums.

The following topics can be found in this chapter :

- See [What is Kiwi Syslog Web Access](#) for a general overview of the product.
- See [Configuration](#) for information on how to configure Kiwi Syslog Web Access with Kiwi Syslog Server.

## 1.1 What is Kiwi Syslog Web Access?

Kiwi Syslog Web Access is a web-based access portal for Kiwi Syslog Server, which provides web-based filtering and highlighting of syslog events logged from Kiwi Syslog Server.

Kiwi Syslog Web Access can run on the following Windows operating system versions:


- Windows 2012
- Windows 2012 R2
- Windows 2003 R2 \*
- Windows 2008 R2 \*
- Windows 8
- Windows 8.1
- Windows 7 \*

\* x86 and x64 editions supported.

## 1.2 Configuration

Kiwi Syslog Web Access provides web-based filtering and highlighting of syslog events logged from Kiwi Syslog Server.

To configure Kiwi Syslog Server to log events to Kiwi Syslog Web Access, create a "Log To Kiwi Syslog Web Access" action in Kiwi Syslog Server:

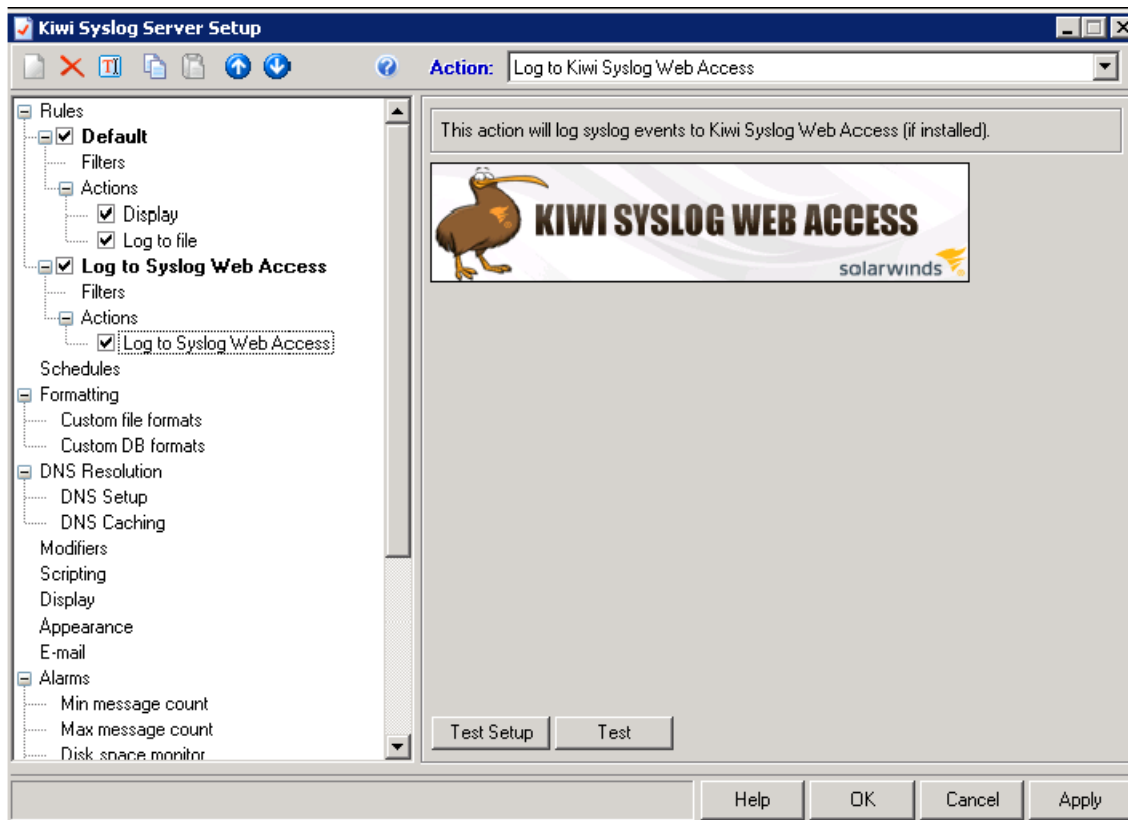

## 2 End User License Agreement (EULA)

### SOLARWINDS END USER LICENSE AGREEMENT

This End User License Agreement (the "Agreement") is hereby entered into and agreed upon by you, either an individual or an entity, and its Affiliates (defined below) ("You" or "Company") and **SolarWinds Worldwide, LLC** ("SolarWinds Worldwide") for the Software (as defined below).

### 2.1 Definitions

- **"Affiliates"** means an entity controlled by, under common control with, or controlling such party, where control is denoted by having fifty percent (50%) or more of the voting power (or equivalent) of the applicable entity. Subject to the terms and conditions of this Agreement, Affiliates may use the license granted hereunder. All references to SolarWinds shall be deemed to be references to SolarWinds and its Affiliates, and all references to Company, You, or Your shall be deemed to be references to Company and its Affiliate(s).
- **"Computer"** means the hardware, if the hardware is a single computer system, whether physical or virtual, or means the computer system with which the hardware operates, if the hardware is a computer system component.
- **"Documentation"** means the user documentation provided by SolarWinds Worldwide to You on the use of the Software. For the avoidance of doubt, any installation guide or end user documentation not prepared or provided by SolarWinds; any online community site; or feedback does not constitute Documentation.

- **“Software”** means the object code versions of the product, together with the updates, new releases or versions, modifications or enhancements, owned and provided by SolarWinds Worldwide to You pursuant to this Agreement.

## 2.2 Grant of License

- **Production License.** Upon payment of the applicable fees for the Software and continuous compliance with the terms and conditions of this Agreement, SolarWinds Worldwide hereby grants You a limited, perpetual, nonexclusive, nontransferable license to use the object code of the Software and Documentation in Your facility subject to the terms contained herein:
  - For each Software license key that You purchase from SolarWinds Worldwide, You may: (i) use the Software on any single Computer, unless the Documentation clearly indicates otherwise; and (ii) copy the Software for back-up and archival purposes, provided any copy must contain all of the original Software's proprietary notices and a notice that it will not be used for transfer, distribution or sale.
  - The Software is in use on a Computer when it is loaded into temporary memory or installed in permanent memory (hard drive, CD-ROM or other storage device). You agree to use Your reasonable efforts to prevent and protect the contents of the Software and Documentation from unauthorized use or disclosure, with at least the same degree of care that You use to protect Your own confidential and proprietary information, but in no event less than a reasonable degree of care under the circumstances. You agree that You will register this Software only with SolarWinds and that You will only install a Software license key obtained directly from SolarWinds.
- **Software Evaluation License.** If the Software is provided to You for evaluation purposes, SolarWinds Worldwide grants to You a nonexclusive, limited, royalty-free, nontransferable evaluation license to use the Software solely for evaluation prior to purchase (an “Evaluation License”). The Evaluation License shall terminate on the end date of the pre-determined evaluation period or immediately upon notice from SolarWinds at its sole discretion. Notwithstanding any other provision contained herein, Software provided pursuant to an Evaluation License is provided to You “AS IS” without indemnification, support, or warranty of any kind, express or implied. Except to the extent such terms conflict with the specific Evaluation License terms set forth in this Section, all other terms of this End

User License shall apply to Software licensed under an Evaluation License.

- **High Availability and/or Disaster Recovery Purpose License.** If You are obtaining a redundant version of the Software solely for high availability and/or disaster recovery purposes for use on Your disaster recovery Computer, You represent and warrant that (i) You may actively run the redundant version of the Software on a Computer, provided it is not running on a primary production Computer, unless (a) the primary production Computer related to the primary production version of the Software fails, (b) the Software or Computer associated with the primary production license is being upgraded or replaced, or (c) other temporary reasons that disrupt all or a material part of Your business operations; (ii) You will not utilize the redundant version of the Software to monitor any items not being monitored by the primary production Computer; and (iii) You will promptly get the primary production Computer hosting the primary production license license operating correctly in order to support Your daily activities.

## 2.3 License Restrictions

- You may not: (i) provide, make available to, or permit other individuals to use the Software or Documentation, except under the terms listed above, either in whole or part; (ii) modify, translate, reverse engineer, decompile, disassemble, create derivative works, or otherwise attempt to derive the source code based upon the Software or Documentation; (iii) copy, reproduce, republish, upload, post, or transmit the Software or Documentation (except for back-up or archival purposes, which will

not be used for transfer, distribution, or sale); (iv) license, sell, rent, lease, transfer, sublicense, distribute, or otherwise transfer rights to the Software or Documentation; (v) remove any proprietary notices or labels on the Software or Documentation; or (vi) license the Software if You are a direct competitor of SolarWinds for the purposes of monitoring the Software's availability, performance, or functionality or for any other benchmarking or competitive purposes. Any such forbidden use shall immediately terminate Your license to the Software. The Software, including its monitoring, managing, recording, playback, and download features, are intended only for use with public domain or properly licensed third party materials. You might need a third party license to create, copy, download, record or save third-party media or content files for playback by this Software or to serve or distribute such files to be played back by the Software. All responsibility for obtaining such a license is Yours, and SolarWinds shall not be responsible for Your failure to do so.

- **SolarWinds Trademarks.** You may not delete, remove, hide, move or alter any trademark, logo, icon, image or text that represents the company name of SolarWinds, any derivation thereof, or any icon, image, or text that is likely to be confused with the same. All representations of the company name or mark "SolarWinds" or any of its Affiliates' names or marks must remain as originally distributed regardless of the presence or absence of a trademark, copyright, or other intellectual property symbol or notice.
- **Export Restrictions.** The Software and Documentation delivered to You under this Agreement are subject to U.S. export control laws and regulations and may also be subject to import and export laws of the jurisdiction in which it was obtained, if outside the U.S. You shall abide by all applicable export control laws, rules and regulations applicable to the Software and Documentation. You agree that You will not export, re-export, or transfer the Software or Documentation, in whole or in part, to any country, person, or entity subject to U.S. export restrictions. You specifically agree not to export, re-export, or transfer the Software or Documentation (i) to any country to which the U.S. has embargoed or restricted the export of goods or services, or to any national of any such country, wherever located, who intends to transmit or transport the products back to such country; (ii) to any person or entity who You know or have reason to know will utilize the Software or portion thereof in the design, development, production or use of nuclear, chemical or biological materials, facilities, or weapons; or (iii) to any person or entity who has been prohibited from participating in U.S. export transactions by any federal agency of the U.S. government.
- **Compliance with Applicable Laws.** The Software and Documentation are protected by the intellectual property laws and other laws of the United States and international laws and treaties, including intellectual property laws. You agree that You shall use the Software and Documentation solely in a manner that complies with all applicable laws in the jurisdictions in which You use the Software and Documentation, including, but not limited to, applicable restrictions concerning copyright and other intellectual property rights.
- **RIGHTS RESERVED.** THE SOFTWARE IS LICENSED, NOT SOLD. Use herein of the word "purchase" in conjunction with licenses, license keys, or the Software shall not imply a transfer of ownership. Unless as conveyed herein, this Agreement does not grant You any rights, title, or interest in or to Software, Documentation, trademarks, service marks, or trade secrets, or corresponding intellectual property (including without limitation any images, photographs, animations, video, audio, music, and text incorporated into the Software, the accompanying printed materials, and any copies of the Software) of SolarWinds or its suppliers, and all rights, title, and interest in and to the Software, Documentation, and corresponding intellectual property shall remain the property of SolarWinds, its suppliers, or are publicly available. All rights not expressly granted under this Agreement are reserved by SolarWinds, its suppliers, or third parties. All title, rights, and interest in and to content, which may be accessed through the Software, is the property of the respective owner and may be protected by applicable intellectual property laws and treaties. This Agreement gives You no rights to such content, including use of the same. SolarWinds agrees that the data and



information (including without limitation, computer software, computer database, computer software documentation, specifications, design drawings, reports, blueprints, and the like) generated by the Software from Your proprietary data and information shall be and remain Your sole property.

- **DATA RIGHTS.** You agree that SolarWinds will collect and track technical and related information about You and Your use of the Software, which may include Your internet protocol address, hardware identifying information, operating system, application software, peripheral hardware, and Software usage statistics to assist with the necessary operation and function of the Software, the provision of updates, support, invoicing, marketing by SolarWinds or its agents, and research and development. As a reminder, SolarWinds Privacy Policy can be found here (<http://www.solarwinds.com/privacy.aspx>), and SolarWinds may update its Privacy Policy from time to time.
- **LIMITED WARRANTY.** SolarWinds Worldwide warrants to You that for a period of thirty (30) days following the initial purchase and delivery of the Software to You that the Software will perform substantially in conformance with the Documentation. SolarWinds Worldwide does not warrant that the Software will meet all of Your requirements or that the use of the Software will be uninterrupted or error-free. The foregoing warranty applies only to failures in operation of the Software that are reproducible in standalone form and does not apply to: (i) Software that is modified or altered by You or any third party that is not authorized by SolarWinds Worldwide; (ii) Software that is otherwise operated in violation of this Agreement or other than in accordance with the Documentation; or (iii) failures that are caused by other software or hardware products. To the maximum extent permitted under applicable law, as SolarWinds' and its suppliers' entire liability, and as Your exclusive remedy for any breach of the foregoing warranty, SolarWinds Worldwide will, at its sole option and expense, promptly repair or replace any Software that fails to meet this limited warranty or, if SolarWinds Worldwide is unable to repair or replace the Software, refund to You the applicable license fees paid upon return, if applicable, of the nonconforming item to SolarWinds Worldwide. The warranty is void if failure of the Software has resulted from accident, abuse, or misapplication. Any replacement Software under this limited warranty will be warranted for thirty (30) days.

EXCEPT AS EXPRESSLY STATED IN THIS SECTION, TO THE MAXIMUM EXTENT PERMITTED UNDER APPLICABLE LAW, SOLARWINDS IS PROVIDING AND LICENSING THE SOFTWARE TO YOU "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, TITLE, NON-INFRINGEMENT, AND FITNESS FOR A PARTICULAR PURPOSE.

- **INTELLECTUAL PROPERTY INDEMNIFICATION.** SolarWinds Worldwide will indemnify and hold You harmless from any third party claim brought against You that the Software, as provided by SolarWinds Worldwide to You under this Agreement and used within the scope of this Agreement, infringes or misappropriates any U.S. patent, copyright, trademark, trade secret, or other intellectual property rights of a third party, provided (i) use of the Software by You is in conformity with the Agreement and Documentation; (ii) the infringement is not caused by modification or alteration of the Software or Documentation; and/or (iii) the infringement was not caused by a combination or use of the Software with products not supplied by SolarWinds. SolarWinds Worldwide's indemnification obligations are contingent upon You: (i) promptly notifying SolarWinds Worldwide in writing of the claim; (ii) granting SolarWinds Worldwide sole control of the selection of counsel, defense, and settlement of the claim; and (iii) providing SolarWinds Worldwide with reasonable assistance, information and authority required for the defense and settlement of the claim. This Section states SolarWinds' entire liability (and shall be Company's sole and exclusive remedy) with respect to indemnification to Company.
- **LIMITATION OF LIABILITY.** TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT WILL SOLARWINDS, ITS DIRECTORS, OFFICERS, AGENTS, SUPPLIERS AND LICENSORS, BE LIABLE TO YOU (WHETHER IN CONTRACT, TORT (INCLUDING

NEGLIGENCE) OR OTHERWISE) (I) FOR MORE THAN THE AMOUNT OF LICENSE FEES THAT YOU HAVE PAID TO SOLARWINDS IN THE PRECEDING (12) TWELVE MONTHS FOR THE APPLICABLE SOFTWARE OR (II) FOR ANY INDIRECT, INCIDENTAL, CONSEQUENTIAL, SPECIAL, PUNITIVE, OR EXEMPLARY DAMAGES, INCLUDING WITHOUT LIMITATION LOST PROFITS, LOST BUSINESS OPPORTUNITIES, LOSS OF USE OF THE SERVICE OFFERING, LOSS OF GOODWILL, BUSINESS INTERRUPTION, LOSS OF DATA, LOST SAVINGS, OR OTHER ECONOMIC DAMAGE, ARISING OUT OF THIS AGREEMENT OR THE USE OR INABILITY TO USE THE SOFTWARE OR DOCUMENTATION, EVEN IF SOLARWINDS OR A DEALER AUTHORIZED BY SOLARWINDS HAD BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

- **Third Party Programs.** To the extent the Software is bundled with third party software programs; these third party software programs are governed by their own license terms, which may include open source or free software licenses. Nothing in this Agreement limits an end user's rights under, or grants the end user rights that supersede, the terms of any such third party software.
- **CHOICE OF LAW AND VENUE.** This Agreement shall be governed by the laws of the State of Texas and of the United States, without regard to any conflict of laws provisions, except that the United Nations Convention on the International Sale of Goods shall not apply. The parties agree that the provisions of the Uniform Computer Information Transactions Act shall not apply to this Agreement. You hereby consent to jurisdiction of the courts of both the state or federal courts of Texas.
- **COUNTERPARTS AND FACSIMILE SIGNATURE.** This Agreement may be executed in counterparts, each of which shall be deemed an original and all of which shall constitute one and the same instrument. The Parties may exchange signature pages by facsimile and such signatures shall be effective to bind the Parties.
- **COMPLETE AGREEMENT.** This Agreement constitutes the entire agreement between the Parties and supersedes all prior or contemporaneous communications, agreements and understandings, written or oral, with respect to the subject matter hereof including without limitation the terms of any party or any purchase order issued in connection with this Agreement. If any provision of this Agreement is held to be unenforceable, that shall not affect the enforceability of the remaining provisions. This Agreement shall not be amended or modified except in a writing signed by authorized representatives of each party.
- **RESTRICTED RIGHTS.** SolarWinds' Software is provided to non-DOD agencies with RESTRICTED RIGHTS and its supporting documentation is provided with LIMITED RIGHTS. Use, duplication, or disclosure by the government is subject to the restrictions as set forth in subparagraph "C" of the Commercial Computer Software – Restricted Rights clause at FAR 52.227-19. In the event the sale is to a DOD agency, the government's rights in software, supporting documentation, and technical data are governed by the restrictions in the Technical Data Commercial Items clause at DFARS 252.227-7015 and DFARS 227.7202. Manufacturer is SolarWinds Worldwide, LLC, 7171 Southwest Parkway, Building 400, Austin, Texas 78735.

### 3 Login Gateway

This chapter provides information and guidance relating to the **Login Gateway** page in Kiwi Syslog Web Access.

The following topics can be found in this chapter :

- See [Overview](#) for a general overview of the **Login Gateway** page.
- See [Pass-through Authentication](#) for a general overview of the **Login Gateway's Pass-through Authentication support** page.
- See [AD Authentication](#) to configure the Active Directory Authentication for Kiwi Web Access.

## 3.1 Overview

The **Login Gateway** restricts access to Kiwi Syslog Web Access.



The default (Administrator) account is configured during product installation. To login to Kiwi Syslog Web Access, supply the password created during the installation process.

\*Several users can be configured in Kiwi Web Access. These accounts can be a mixture of both Administrative or Standard Users, with at least one Administrative account.

## 3.2 Pass-through Authentication

Kiwi Syslog Web Access supports pass-through style authentication, enabling direct linking to pages within the website - without having to login manually.

### Consider the following example:

For a usual Kiwi Syslog Web Access installation on localhost port 8088, opening a new browser session and navigating to <http://localhost:8088/Events.aspx> would result in the user seeing the Login Gateway page - ie. Manual authentication would be required.

### Pass-through authentication:

Kiwi Syslog Web Access provides two additional QueryString Parameters to support pass-through authentication.

1. **AccountId**

2. **Password**

**Pass-through (or direct links) in the following form will not require manual login (login will occur automatically):**

[http://localhost:8088/Events.aspx?AccountId=Administrator&Password=\\*\\*\\*\\*\\*](http://localhost:8088/Events.aspx?AccountId=Administrator&Password=*****)

### 3.3 AD Authentication

This setting will allow an Administrator to configure the Active Directory Authentication for Kiwi Web Access. The AD users has to use their Login ID as “domain\domain ID”. Then KWA will use the authentication through AD.

#### Domain URL:

Enter the Active Directory LDAP URL here.

#### Authentication Type:

This setting determines how KWA Server is interacting with the Domain Server by using the Domain URL. If the field is blank, the application will treat it as ‘Secure’

Different types are:

<b>Anonymous</b>	No authentication is performed.
<b>Delegation</b>	Enables Active Directory Services Interface (ADSI) to delegate the user's security context, which is necessary for moving objects across domains.
<b>Encryption</b>	Attaches a cryptographic signature to the message that both identifies the sender and ensures that the message has not been modified in transit.
<b>FastBind</b>	Specifies that ADSI will not attempt to query the Active Directory Domain Services objectClass property. Therefore, only the base interfaces that are supported by all ADSI objects will be exposed. Other interfaces that the object supports will not be available. A user can use this option to boost the performance in a series of object manipulations that involve only methods of the base interfaces. However, ADSI does not verify if any of the request objects actually exist on the server.
<b>None</b>	Equates to zero, which means to use basic authentication (simple bind) in the LDAP provider.
<b>ReadonlyServer</b>	For a WinNT provider, ADSI tries to connect to a domain controller. For Active Directory Domain Services, this flag indicates that a writable server is not required for a serverless binding.
<b>Sealing</b>	Encrypts data using Kerberos. The Secure flag must also be set to use sealing.
<b>Secure</b>	Requests secure authentication. When this flag is set, the WinNT provider uses NTLM to authenticate the client. Active Directory Domain Services uses Kerberos, and possibly NTLM, to authenticate the client. When the user name and password are a null reference ( <b>Nothing</b> in Visual Basic), ADSI binds to the object using the security context of the calling thread, which is either the security context of the user account under which the application is running or of the

	client user account that the calling thread is impersonating.
<b>SecureSocketsLayer</b>	Attaches a cryptographic signature to the message that both identifies the sender and ensures that the message has not been modified in transit. Active Directory Domain Services requires the Certificate Server be installed to support Secure Sockets Layer (SSL) encryption.
<b>ServerBind</b>	If your ADsPath includes a server name, specify this flag when using the LDAP provider. Do not use this flag for paths that include a domain name or for serverless paths. Specifying a server name without also specifying this flag results in unnecessary network traffic.
<b>Signing</b>	Verifies data integrity to ensure that the data received is the same as the data sent. The Secure flag must also be set to use signing.

### User Groups:

Administrator can restrict the access to Kiwi Web Access to specific domain user groups. Multiple user groups can also be provided here (separated by ;).

### For example:

Domain (FQDN): server.domain.com

Authentication Type: <blank>, defaults to Secure

User Groups: Domain Admins

**Active Directory Settings**

Domain URL:

Authentication Type:

User Groups:

(separate group names)

Save AD Settings

For more information about enabling [SSL for Kiwi Web Access](#).

## 3.4 Enabling SSL

To enable SSL complete the following:

After Kiwi Web access has been installed-

1. Open **UltiDev Web App Explorer**.
2. Click **Ecosystem** to create SSL certificate.
3. Click on '**Create New Certificate**'.
4. Click on '**Create self-signed test certificate**'.
5. Choose/text the name of SSL identity.
6. Click '**OK**' after view the created certificate details.
7. Created certificate will be listed as like below.
8. Click to register new site or application with **UltiDev Web Server**.
9. Select the option '**ASP.NET web Application**' and proceed.
10. Select the option '**ASP.NET 2.0, 3.0 or 3.5**' and proceed.
11. Select the second option to load 'native 32 bit components' and then click **Next**.
12. Select '**LOCAL SYSTEM**' and and then click **Next**.
13. Browse for default document.
14. Select Gateway.aspx file from [\\SolarWinds\Kiwi Syslog Web Access\html](#) in installed location.
15. Change the application name to '**Syslogd**'.
16. Remove the virtual directory default entry and leave it blank.
17. Remove the existing **HTTP Listen Address** for Kiwi Web Access.
18. Add HTTPS/SSL Listen Address.
19. Select the created certificate.
20. Choose the port by '**Find Free Port**' option or enter your own port and proceed.
21. Select the option '**Anonymous**'.
22. Click **Finish**.

23. Created host will be listed in the left side panel.
24. This can be verified by browsing.
25. Your host will be accessed using https.

## 4 Events

This chapter provides information and guidance relating to the **Events** page in Kiwi Syslog Web Access.

The following topics can be found in this chapter :


- See [Overview](#) for a general overview of the **Events** page.
- See [Filtering Events](#) for information on displaying filtered events.
- See [Events Grid](#) for information on the layout of the events grid.
- See [Event Highlighting](#) for information on event highlighting in the events grid.
- See [Find](#) for information on searching for events in the events grid.
- See [Quick Filtering](#) for information on event filter refinement in the events grid.
- See [Direct Link](#) for information on direct linking to the Events page.
- See [Export to CSV](#) for information on exporting to CSV from the Events page.

### 4.1 Overview

The **Events** page displays syslog events that have been logged to Kiwi Syslog Web Access by Kiwi Syslog Server.


The events page is set to auto-refresh, based upon the **Page Refresh Rate** setting, accessible from the **Settings** page.

Whether or not the events page refreshes automatically is controllable through the **Pause** and **Resume** buttons.

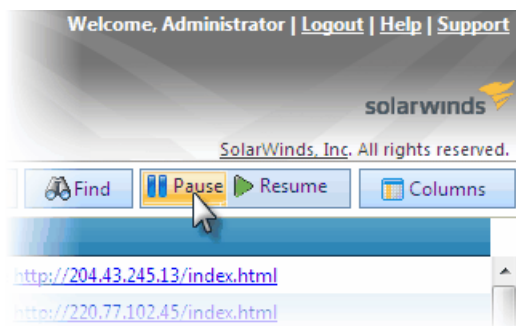

## 4.2 Filtering Events

The syslog events that are displayed in the Events grid can be filtered by selecting from the **Filter** drop-down in the events page of Kiwi Syslog Web Access:

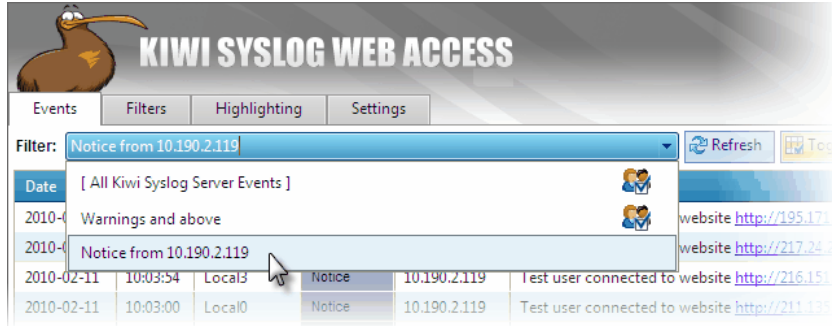

The filter drop-down includes two default (system-defined) filters:


- [All Kiwi Syslog Server Events]  
*Displays all available syslog event data.*
- Warnings and above  
*Displays syslog events with a priority level of Warning and above (ie. Emergency, Critical, Alert and Warning).*

Additional (user-defined) filters appear in this drop-down as well.

## 4.3 Events Grid


The layout of the Kiwi Syslog Web Access events grid is fully customizable. Changes made, including column order (positioning), column sizes and column visibility, apply only to the selected filter, enabling users to create layouts that relate directly to the filtered event data.

Columns can be repositioned by clicking and dragging columns in the column header.

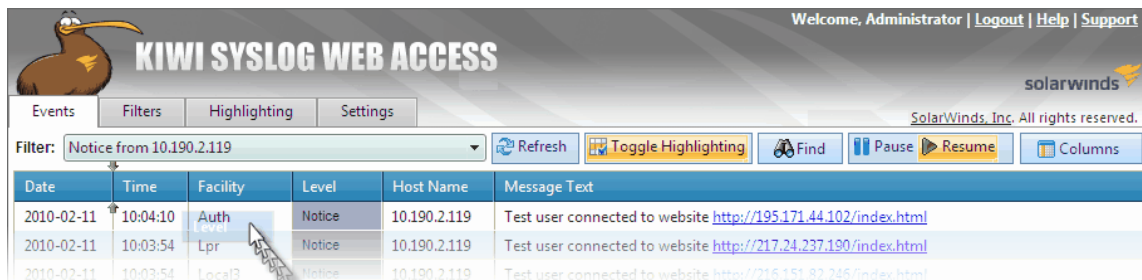


Columns can be resized by clicking and dragging between columns in the column header.



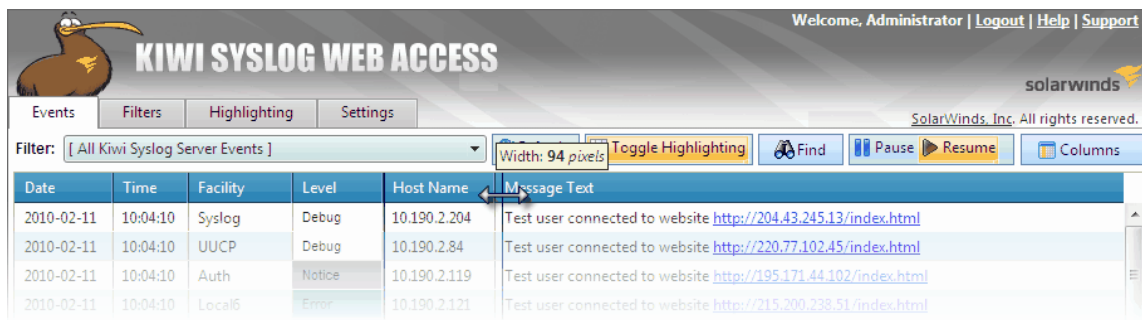


Columns can be shown or hidden by clicking on the **Columns** button and checking or unchecking the column names.

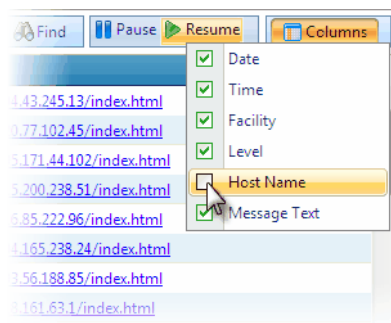

## 4.4 Event Highlighting

Syslog events that are displayed in the events grid inherit highlighting attributes from highlighting rules configured in the **Highlighting** page.


Highlighting in the events grid can be turned on or off using the **Toggle Highlighting** button.

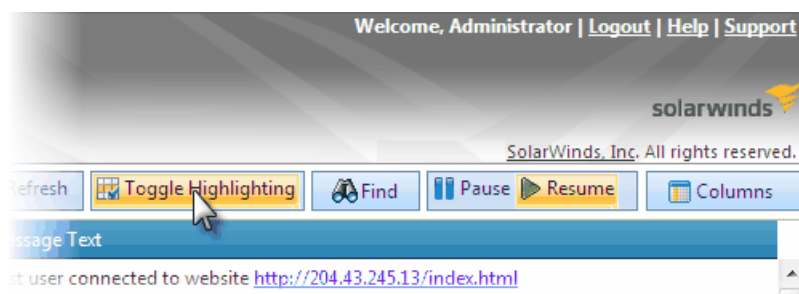

## 4.5 Find

Syslog events can be searched easily using the Find function.

Items matching the search terms provided will be highlighted in the events grid.

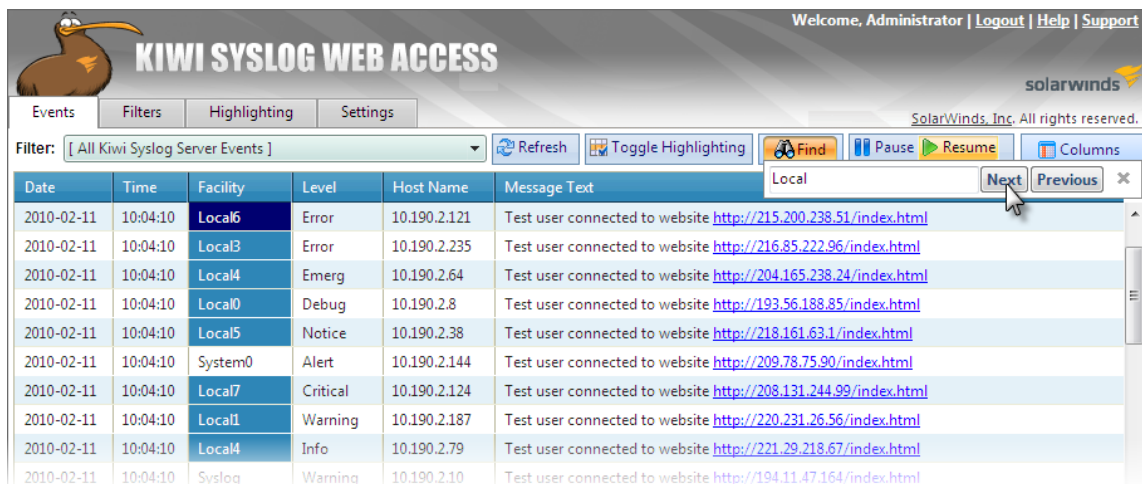

Welcome, Administrator | [Logout](#) | [Help](#) | [Support](#)

**KIWI SYSLOG WEB ACCESS**

solarwinds

SolarWinds, Inc. All rights reserved.

Events Filters Highlighting Settings

Filter: [ All Kiwi Syslog Server Events ] Refresh Toggle Highlighting Find Pause Resume Columns


Date	Time	Facility	Level	Host Name	Message Text
2010-02-11	10:04:10	Local6	Error	10.190.2.121	Test user connected to website <a href="http://215.200.238.51/index.html">http://215.200.238.51/index.html</a>
2010-02-11	10:04:10	Local3	Error	10.190.2.235	Test user connected to website <a href="http://216.85.222.96/index.html">http://216.85.222.96/index.html</a>
2010-02-11	10:04:10	Local4	Emerg	10.190.2.64	Test user connected to website <a href="http://204.165.238.24/index.html">http://204.165.238.24/index.html</a>
2010-02-11	10:04:10	Local0	Debug	10.190.2.8	Test user connected to website <a href="http://193.56.188.85/index.html">http://193.56.188.85/index.html</a>
2010-02-11	10:04:10	Local5	Notice	10.190.2.38	Test user connected to website <a href="http://218.161.63.1/index.html">http://218.161.63.1/index.html</a>
2010-02-11	10:04:10	System0	Alert	10.190.2.144	Test user connected to website <a href="http://209.78.75.90/index.html">http://209.78.75.90/index.html</a>
2010-02-11	10:04:10	Local7	Critical	10.190.2.124	Test user connected to website <a href="http://208.131.244.99/index.html">http://208.131.244.99/index.html</a>
2010-02-11	10:04:10	Local1	Warning	10.190.2.187	Test user connected to website <a href="http://220.231.26.56/index.html">http://220.231.26.56/index.html</a>
2010-02-11	10:04:10	Local4	Info	10.190.2.79	Test user connected to website <a href="http://221.29.218.67/index.html">http://221.29.218.67/index.html</a>
2010-02-11	10:04:10	Syslog	Warning	10.190.2.10	Test user connected to website <a href="http://194.11.47.164/index.html">http://194.11.47.164/index.html</a>

Local Next Previous

## 4.6 Quick Filtering

Syslog events that are displayed in the events grid can be refined using the filter refinement or quick filter function.

By clicking on items in the events grid, quick filter terms are added, and the currently selected filter is refined to include these terms.

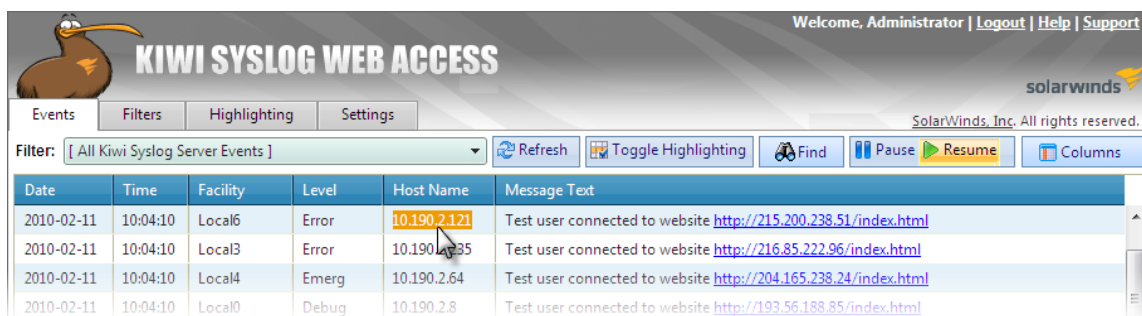

Welcome, Administrator | [Logout](#) | [Help](#) | [Support](#)

**KIWI SYSLOG WEB ACCESS**


solarwinds

SolarWinds, Inc. All rights reserved.

Events Filters Highlighting Settings

Filter: [ All Kiwi Syslog Server Events ] Refresh Toggle Highlighting Find Pause Resume Columns

Date	Time	Facility	Level	Host Name	Message Text
2010-02-11	10:04:10	Local6	Error	10.190.2.121	Test user connected to website <a href="http://215.200.238.51/index.html">http://215.200.238.51/index.html</a>
2010-02-11	10:04:10	Local3	Error	10.190.2.235	Test user connected to website <a href="http://216.85.222.96/index.html">http://216.85.222.96/index.html</a>
2010-02-11	10:04:10	Local4	Emerg	10.190.2.64	Test user connected to website <a href="http://204.165.238.24/index.html">http://204.165.238.24/index.html</a>
2010-02-11	10:04:10	Local0	Debug	10.190.2.8	Test user connected to website <a href="http://193.56.188.85/index.html">http://193.56.188.85/index.html</a>

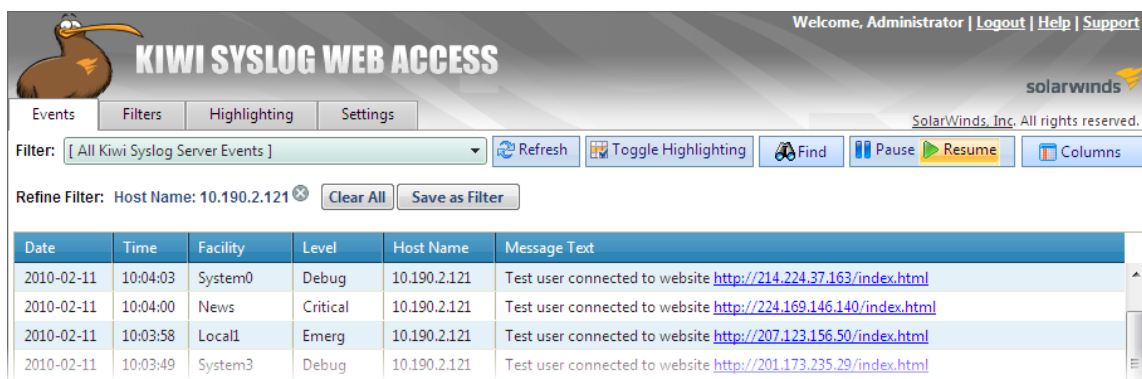

Welcome, Administrator | [Logout](#) | [Help](#) | [Support](#)

**KIWI SYSLOG WEB ACCESS**

solarwinds


SolarWinds, Inc. All rights reserved.

Events Filters Highlighting Settings

Filter: [ All Kiwi Syslog Server Events ] Refresh Toggle Highlighting Find Pause Resume Columns


Refine Filter: Host Name: 10.190.2.121 Clear All Save as Filter

Date	Time	Facility	Level	Host Name	Message Text
2010-02-11	10:04:03	System0	Debug	10.190.2.121	Test user connected to website <a href="http://214.224.37.163/index.html">http://214.224.37.163/index.html</a>
2010-02-11	10:04:00	News	Critical	10.190.2.121	Test user connected to website <a href="http://224.169.146.140/index.html">http://224.169.146.140/index.html</a>
2010-02-11	10:03:58	Local1	Emerg	10.190.2.121	Test user connected to website <a href="http://207.123.156.50/index.html">http://207.123.156.50/index.html</a>
2010-02-11	10:03:49	System3	Debug	10.190.2.121	Test user connected to website <a href="http://201.173.235.29/index.html">http://201.173.235.29/index.html</a>

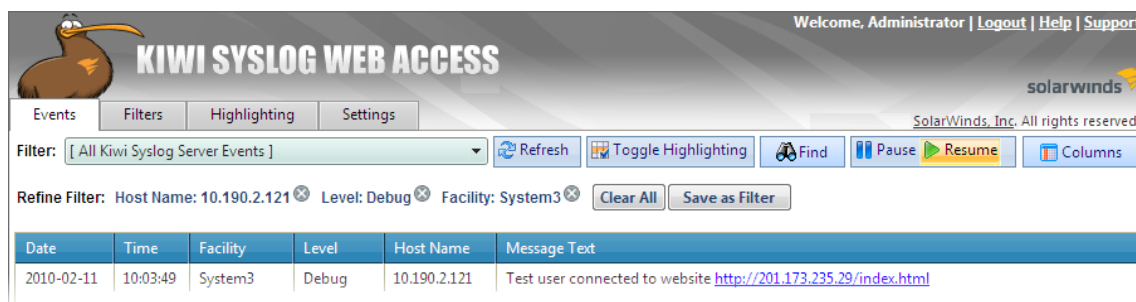

Quick filter terms can be removed individually, or altogether by clicking the **Clear All** button.

The current filter refinement can be saved as a new filter, by clicking the **Save as Filter** button.

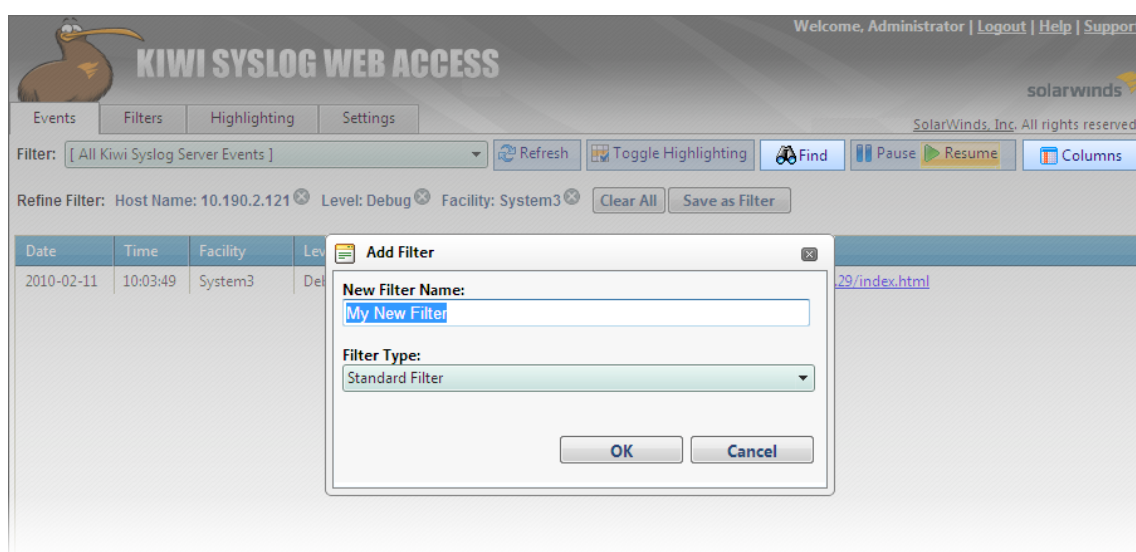


## 4.7 Direct Link

Kiwi Syslog Web Access support direct linking.


Direct linking is a way of specifying filter refinements in the URL, enabling links to be built and passed to Web Access from other systems (such as SolarWinds® Orion NPM).

**The Direct Link button:**

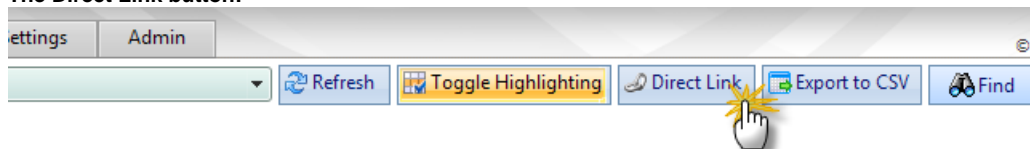

Clicking on the Direct Link button will open a new window with the direct link in the Address bar.

eg. This link was generated from a [Quick Filter](#), by clicking the **Direct Link** button in the toolbar.

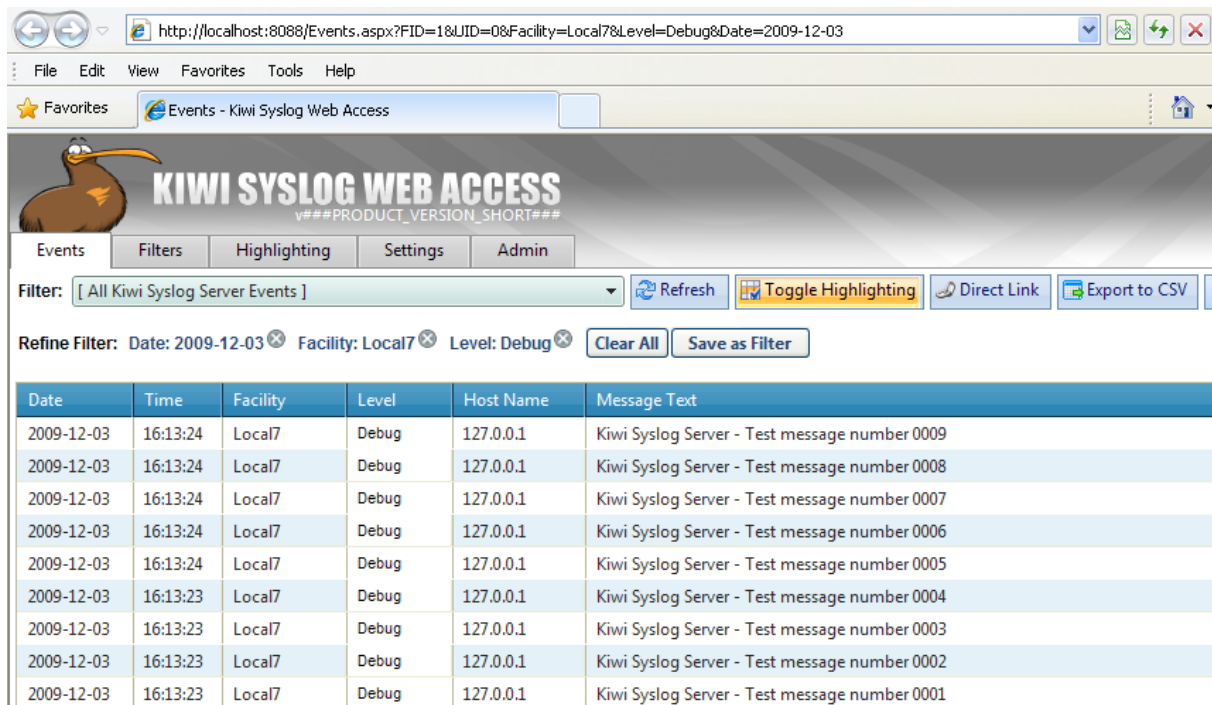

The screenshot shows the Kiwi Syslog Web Access application running in a web browser. The address bar displays the URL: `http://localhost:8088/Events.aspx?FID=1&UID=0&Facility=Local7&Level=Debug&Date=2009-12-03`. The application header includes the Kiwi Syslog logo and the text "KIWI SYSLOG WEB ACCESS v###PRODUCT\_VERSION\_SHORT###". Below the header, there are tabs for "Events", "Filters", "Highlighting", "Settings", and "Admin". The "Events" tab is active, showing a list of events. Above the list, there is a "Filter:" dropdown menu set to "[ All Kiwi Syslog Server Events ]", and buttons for "Refresh", "Toggle Highlighting", "Direct Link", and "Export to CSV". Below the filter, there is a "Refine Filter:" section with "Date: 2009-12-03", "Facility: Local7", and "Level: Debug", along with "Clear All" and "Save as Filter" buttons. The events are displayed in a table with the following columns: Date, Time, Facility, Level, Host Name, and Message Text.


Date	Time	Facility	Level	Host Name	Message Text
2009-12-03	16:13:24	Local7	Debug	127.0.0.1	Kiwi Syslog Server - Test message number 0009
2009-12-03	16:13:24	Local7	Debug	127.0.0.1	Kiwi Syslog Server - Test message number 0008
2009-12-03	16:13:24	Local7	Debug	127.0.0.1	Kiwi Syslog Server - Test message number 0007
2009-12-03	16:13:24	Local7	Debug	127.0.0.1	Kiwi Syslog Server - Test message number 0006
2009-12-03	16:13:24	Local7	Debug	127.0.0.1	Kiwi Syslog Server - Test message number 0005
2009-12-03	16:13:23	Local7	Debug	127.0.0.1	Kiwi Syslog Server - Test message number 0004
2009-12-03	16:13:23	Local7	Debug	127.0.0.1	Kiwi Syslog Server - Test message number 0003
2009-12-03	16:13:23	Local7	Debug	127.0.0.1	Kiwi Syslog Server - Test message number 0002
2009-12-03	16:13:23	Local7	Debug	127.0.0.1	Kiwi Syslog Server - Test message number 0001

**Note:** The **AccountId** and **Password** URL parameters are also supported, see [Pass-through Authentication](#) for more information.


[http://localhost:8088/Events.aspx?FID=1&UID=0&Facility=Local7&Level=Debug&Date=2009-12-03&AccountId=Administrator&Password=\\*\\*\\*\\*\\*](http://localhost:8088/Events.aspx?FID=1&UID=0&Facility=Local7&Level=Debug&Date=2009-12-03&AccountId=Administrator&Password=*****)

## 4.8 Export to CSV


Syslog events that are displayed in the events grid can be exported to CSV.

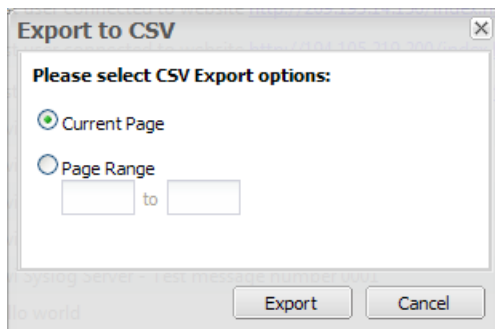

The CSV export function can export either the Current Page or a specified Page Range.

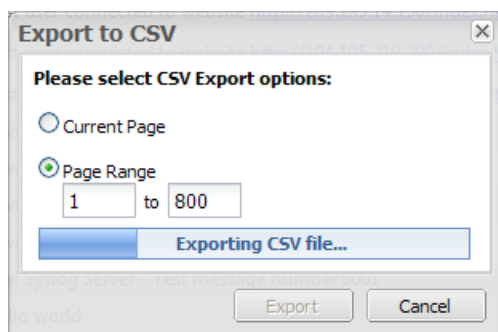

When Export is complete, a save dialog will appear. The filename will default to the name of the filter in the current view.

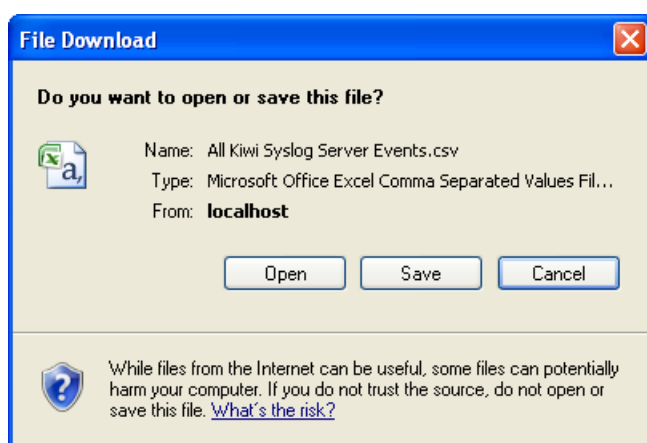


## 5 Filters

This chapter provides information and guidance relating to the **Filters** page in Kiwi Syslog Web Access.

The following topics can be found in this chapter :

- See [Overview](#) for a general overview of the **Filters** page.
- See [Add a filter](#) for information on adding a new filter.
- See [Rename a filter](#) for information on renaming an existing filter.
- See [Import a filter](#) for information on importing a new filter.
- See [Export a filter](#) for information on exporting an existing filter.
- See [Delete a filter](#) for information on deleting an existing filter.
- See [Filter properties](#) for information on configuring filter properties.

## 5.1 Overview

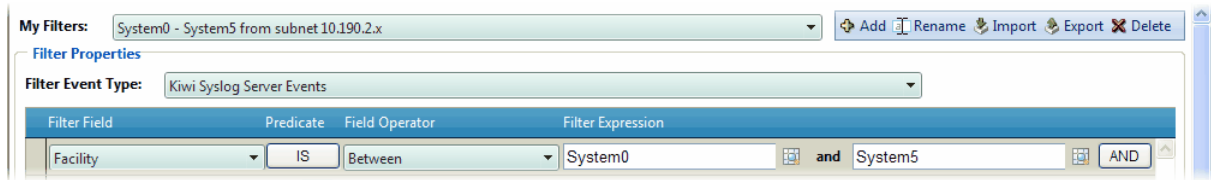

The **My Filters** drop-down list contains a list of user-defined filters. The filters which appear in this list relate only to the current (logged-in) user.

The **Filter toolbar** allows the creation, renaming, import, export and deletion of Filters.


The **Filter properties** section specifies the filter criteria that will be applied for this filter.

The current version of Kiwi Syslog Web Access supports only **Kiwi Syslog Server Event** types.

## 5.2 Add a filter

To add a new filter click the **Add** button in the Filters toolbar.

Enter a name for the new filter when the Add filter dialog appears.

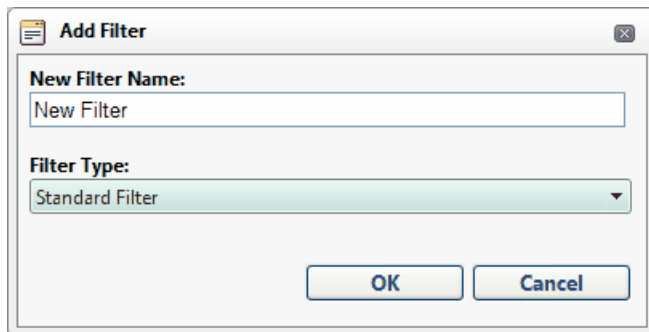


The current version of Kiwi Syslog Web Access supports only standard filter types. Future editions may include other filter types.

## 5.3 Rename a filter

To rename an existing filter, click the **Rename** button in the Filters toolbar.

Enter a new name for the filter when the Rename filter dialog appears.

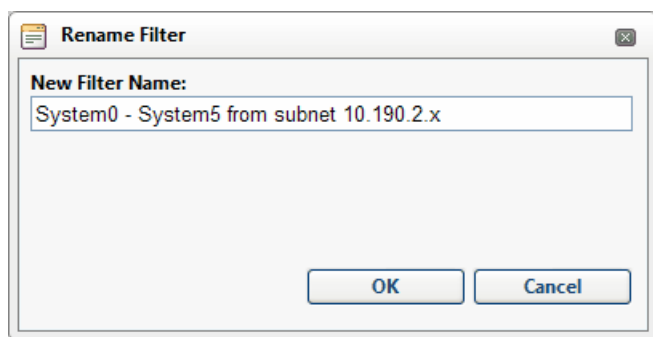


## 5.4 Import a filter

To import a filter (that was previously exported), click the **Import** button in the Filters toolbar.

Select the filter to import when the Import filter dialog appears.

Kiwi Syslog Web Access Filters have the **.ksf** extension by default.

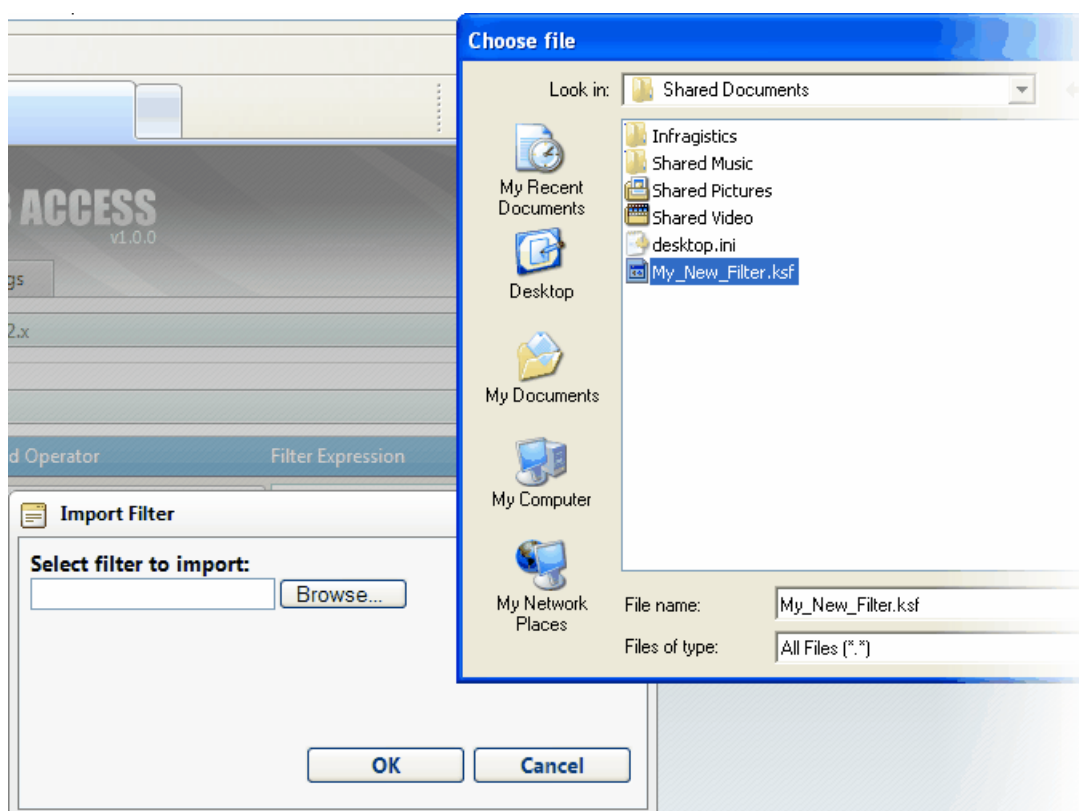


## 5.5 Export a filter

To export a filter, click the **Export** button in the Filters toolbar.

Select the location to save the filter to.

Kiwi Syslog Web Access Filters have the **.ksf** extension by default.

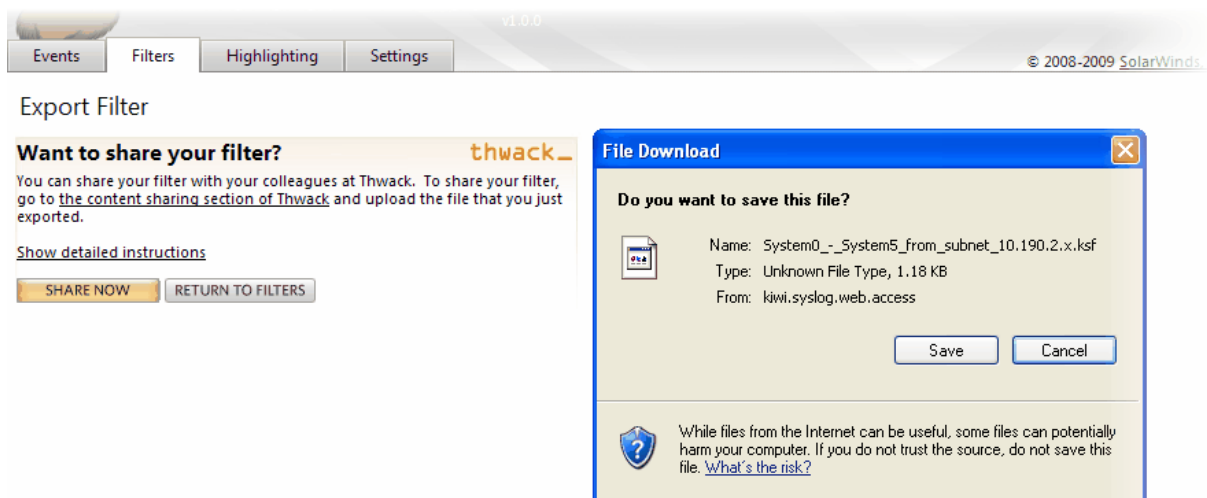

Kiwi Syslog Web Access provides the ability to share your filter with you colleagues at Thwack.


**To share your filter:**

1. Click [here](#).
2. On the Upload File web page, click Specify File/URL.
3. Click Upload File, and then click Browse.
4. Navigate to the filter file you exported, and then click Open.
5. Click Save.
6. Enter a descriptive name for your filter. For example, Syslog Priority - Warnings and above.
7. Provide a description of your filter.
8. Provide Tags so people can find your filter with a quick scan. For example, enter Syslog, Priority, Level, Emerg, Alert, Crit, Warn.
9. Click Save.

## 5.6 Delete a filter

To delete a filter, click the **Delete** button in the Filters toolbar.

Kiwi Syslog Web Access will ask for confirmation before the filter is deleted.

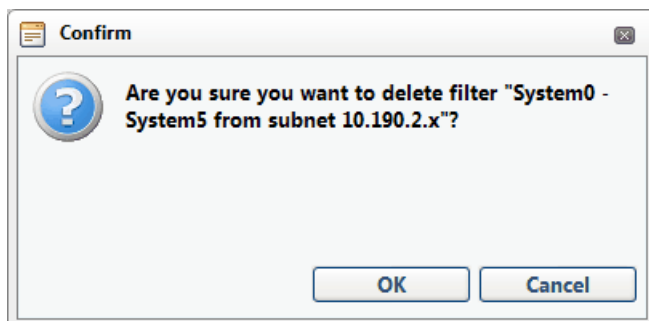



## 5.7 Filter properties

Filters in Kiwi Syslog Web Access consist of a collection of filter items that are evaluated in order, from the top-most filter item.

Filter items are logically joined together using the specified logical join operator (the right-most button in each filter item). Allowable logical join operators are AND and OR.

© 2008-2009 SolarWinds, Inc. All rights reserved.

My Filters: System0 - System5 from subnet 10.190.2.x

Filter Properties

Filter Event Type: Kiwi Syslog Server Events Is Public: ☐

Filter Field	Predicate	Field Operator	Filter Expression
Facility	IS	Between	System0 and System5 AND
Host Name	IS NOT	Like	10.190.2

Add Filter Item Delete Filter Item(s) Test Filter Save Filter

Filters can be shared by marking them public. This is done by checking the "Is Public" checkbox, next to the Filter Event Type selection box.

Public filters appear on the Events page in the Filter selection box with this icon:

To add new filter items, click the **Add Filter Item** button.

### • Filter Field

*The syslog event field to which the filter criteria will be applied.*

Filter Field

Facility

Date

Time

Facility

Level


Host Name

Message Text

- Date
- Time
- Facility
- Level
- Host name

- Message text


- **Predicate**



The screenshot shows a dropdown menu titled "Predicate". It contains two visible options: "IS" and "IS NOT".

- IS
- IS NOT

- **Field Operator**




The screenshot shows a dropdown menu titled "Field Operator". The menu is open, displaying a list of operators: "Between", "Equal to", "Less than", "Less than or equal to", "Greater than", "Greater than or equal to", "Like", "Between", and "Null". The "Between" option is currently selected and highlighted.

- Equal to
- Less than
- Less than or equal to
- Greater than
- Greater than or equal to
- Like
- Between
- Null


- **Filter Expression**

*The expression that will be evaluated. Relates to the specified Filter field.*



The screenshot shows a text input field titled "Filter Expression". The field contains the expression "System0 and System5". Below this, there is another input field containing the IP address "10.190.2".

To test the filter, click the **Test Filter** button. You will see the following message in the status bar if the filter test was successful.



✓ Filter test successful.

To save the filter, click the **Save Filter** button.

## 6 Highlighting

This chapter provides information and guidance relating to the **Highlighting** page in Kiwi Syslog Web Access.

The following topics can be found in this chapter :


- See [Overview](#) for a general overview of the **Highlighting** page.
- See [Import highlighting](#) for information on importing a new filter.
- See [Export highlighting](#) for information on exporting an existing filter.

### 6.1 Overview

The highlighting options available in Kiwi Syslog Web Access enable the user to specify a set of highlighting rules which will be applied to each syslog event that is displayed on the Events page. Highlighting rules are evaluated from the top-down, and any syslog events which match a given rule will have the given highlight-effects applied.

#### Event Highlighting Rules

Lists the highlighting rules that will be applied to each syslog message that is to be displayed. The syslog message field that will be searched, the string pattern that will be searched for, and the effect to be applied are specified in the **Highlight Properties** section. Each rule can be activated/deactivated by respectively checking/unchecking the checkboxes leftmost on each row of the list.

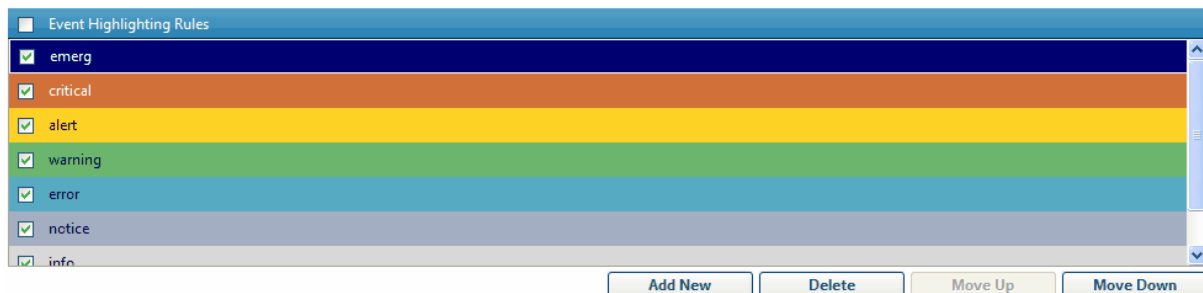

#### Highlight Properties

The list of fields available in the **Event Field** drop-down box relate to the selected **Event Type**\*.

Highlighting rules can be added/deleted by clicking the buttons **Add new** and **Delete**. Rule precedence can be changed as well, by clicking the **Move up/Move down** buttons.

\*The current version of Kiwi Syslog Web Access supports only *Kiwi Syslog Server Event types*.

**Highlight Properties**

Event Type: Kiwi Syslog Server Events Event Field: Level

String to Match: emerg ☐ Regular Expression ☒ Ignore Case

Font Family: Segoe UI Font Size: 12px

Font Style: b i u A

Preview ☐ Apply this effect to the whole event (all fields in matching row)

Export Import Save

### String to match

The string pattern that will be searched for in the selected Event field.

**Regular Expression** If checked, this option specifies if the string to match is a regular expression.

**Ignore Case** If checked, the search pattern (string to match) will be treated as case insensitive.

### Highlight Effects

**Foreground Color** The foreground color selected will be applied, and override any existing foreground color.

**Background Color** The background color selected will be applied, and override any existing background color.

**Bold Font** The font weight will be bold.

**Italic Font** The font style will be italicised.

**Underline Font** The font will be underlined.

**Font Family** The font family.

**Font Size** The size of the font.

### Apply this effect to the whole event (all fields in matching row)


If this option is selected then the specified highlighting style will be applied to every field in the Events grid (not just the selected Event Field).

## 6.2 Import highlighting

To import highlighting, click the **Import** button on the **Highlighting** page.

Select the highlighting to import when the Import Highlighting dialog appears.

Kiwi Syslog Web Access Highlighting has the **.ksh** extension by default.

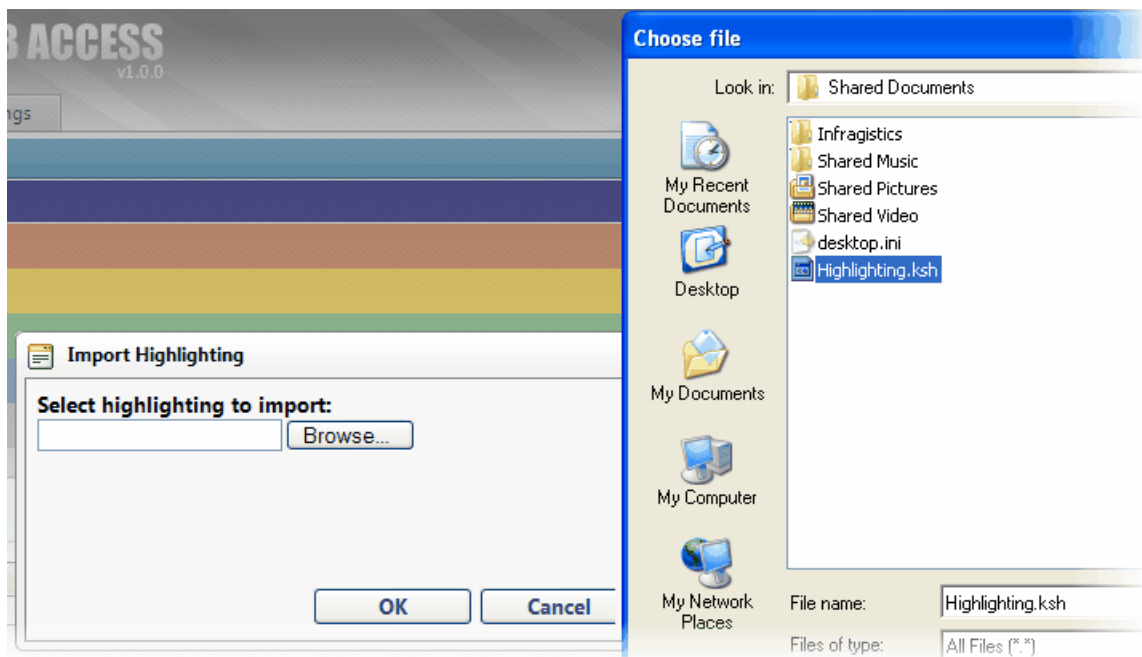


## 6.3 Export highlighting

To export highlighting, click the **Export** button on the **Highlighting** page.

Select the location to save the highlighting to.

Kiwi Syslog Web Access Highlighting has the **.ksh** extension by default.

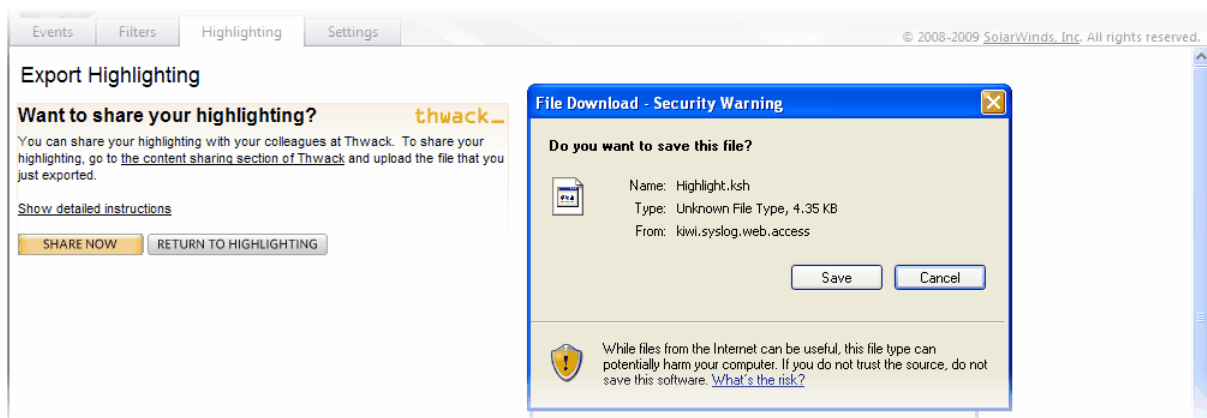

Kiwi Syslog Web Access provides the ability to share your highlighting with you colleagues at Thwack.

### To share your highlighting:

1. Click [here](#).
2. On the Upload File web page, click Specify File/URL.
3. Click Upload File, and then click Browse.
4. Navigate to the highlighting file you exported, and then click Open.

5. Click Save.
6. Enter a descriptive name for your highlighting. For example, Syslog Priority Level Highlighting.
7. Provide a description of your highlighting rules.
8. Provide Tags so people can find your highlighting rules with a quick scan. For example, enter Syslog, Priority, Level.
9. Click Save.

## 7 Settings

This chapter provides information and guidance relating to the **Settings** page in Kiwi Syslog Web Access.

The following topics can be found in this chapter :

- See [Overview](#) for a general overview of the Highlighting page.

### 7.1 Overview

#### General Settings:

The following settings can be configured:

- Rows per page  
*The number of rows displayed in the events grid on a single page.*
- Page refresh rate  
*The interval between automatically refreshing the events grid.*
- Events grid font  
*The default font that events will be rendered in.*
- URLsense  
*If enabled, URLsense will automatically sense URLs contained within the event message, and provide an active hyperlink to the web resource from within the Events grid.*

General Settings

Rows Per Page:

Page Refresh Rate:  seconds

Events Grid Font:

URLsense: ☒ On ☐ Off

[Save Settings](#)

#### User Settings:

Allows the current user to change their password.

**User Settings**

Current password:

New password:

Confirm password:

[Change Password](#)

## 8 Admin

This chapter provides information and guidance relating to the **Admin** page in Kiwi Syslog Web Access.

The following topics can be found in this chapter :

- See [Overview](#) for a general overview of the **Admin** page.
- See [Add new accounts](#) for information on adding new accounts.
- See [Reset password](#) for information on resetting account passwords.
- See [Delete account\(s\)](#) for information on deleting accounts.
- See [Database Maintenance](#) for information on configuring the database maintenance policy.
- See [Website Configuration](#) for information on configuring the website.

### 8.1 Overview

Access to the **Admin** page in Kiwi Syslog Web Access is restricted to **Administrators** only. **Standard users** are prohibited from accessing the **Admin** page.

The Admin page provides an Administrator the ability to:

- [Add new accounts](#)
- [Reset existing account passwords](#)
- [Delete accounts](#)
- [Alter the Database maintenance policy](#)
- [Alter the Session and Execution timeouts](#)

#### Account Maintenance:

Several Administrative or Standard users can be configured in Kiwi Syslog Web Access. The account maintenance section allows for the creation and deletion of user accounts, as well as password resetting.

**Account Maintenance**

[+ Add New Account](#) | [Reset Password](#) | [Delete](#)

<input type="checkbox"/>	Name	Role
<input type="checkbox"/>	Administrator	Administrators
<input type="checkbox"/>	New User 1	Standard Users
<input type="checkbox"/>	New User 2	Standard Users
<input type="checkbox"/>	New Admin	Administrators

Page 1 of 1 | [Refresh](#)

Displaying accounts 1 - 4 of 4

#### Database Maintenance:

Administrators can modify the database maintenance policy that Kiwi Syslog Web Access uses. The default maximum capacity of the Kiwi Syslog Web Access database is 4096MB\*.

\*Maximum data storage for event age based restrictions is also 4096MB.

Database Maintenance

Please select either database size or event age restriction:

☒ Maximum Database Size: 4096 MB

☐ Maximum Event Age: Unlimited\*

\* Maximum data storage for age based database maintenance policy is 4096 MB

Save

### Website Configuration Settings:

Administrators can modify the website configuration that Kiwi Syslog Web Access uses.

Website Configuration Settings


Session Timeout: (Specifies the length of time a session can be idle before it is abandoned) 8 hours

Execution Timeout: (Specifies the length of time that a request is allowed to execute before being automatically shut down by ASP.NET) 5 minutes

Save

**Note:** Making changes to these settings requires restarting the Web Server.

Server restart takes approx. 30 seconds to complete, during which time the website will be unable to service requests.

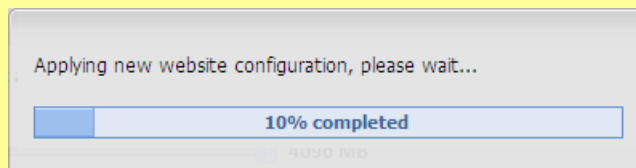

## 8.2 Add an account


To add a new account click the **Add New Account** button in the Account maintenance grid toolbar.

Enter a name, password and select a role for the new account when the Add Account dialog appears.

Roles:

- Administrators - All access
- Standard Users - No access to the 'Admin' page.



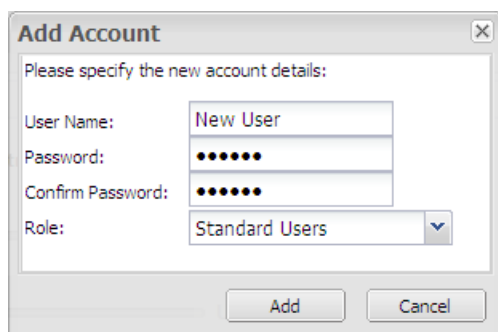

The 'Add Account' dialog box is shown. It contains the following fields:

- User Name: New User
- Password: (masked with dots)
- Confirm Password: (masked with dots)
- Role: Standard Users (dropdown menu)


Buttons: Add, Cancel

## 8.3 Reset password

To reset the password of an account, select an account by checking the checkbox and click on the Reset Password button.

You can only reset one account password at a time.

Enter (and confirm) the new password when the **Reset Password** dialog appears.

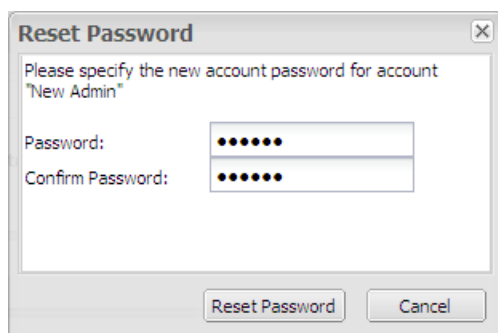


The 'Reset Password' dialog box is shown. It contains the following fields:

- Password: (masked with dots)
- Confirm Password: (masked with dots)

Buttons: Reset Password, Cancel

## 8.4 Delete account(s)

You can delete multiple accounts in Kiwi Syslog Web Access Account Maintenance by checking more than one account, and clicking the Delete button.

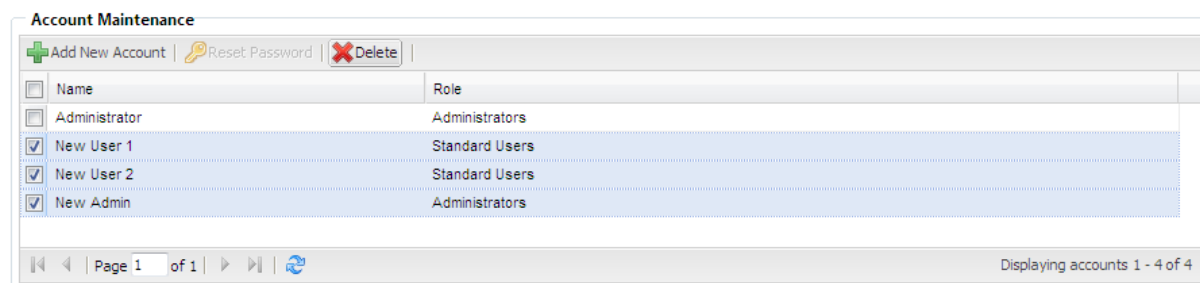


The 'Account Maintenance' dialog box is shown. It contains the following elements:

- Buttons: Add New Account, Reset Password, Delete
- Table:

<input type="checkbox"/>	Name	Role
<input type="checkbox"/>	Administrator	Administrators
<input checked="" type="checkbox"/>	New User 1	Standard Users
<input checked="" type="checkbox"/>	New User 2	Standard Users
<input checked="" type="checkbox"/>	New Admin	Administrators

Page 1 of 1 | Displaying accounts 1 - 4 of 4

The Account deletion confirmation dialog will then appear:

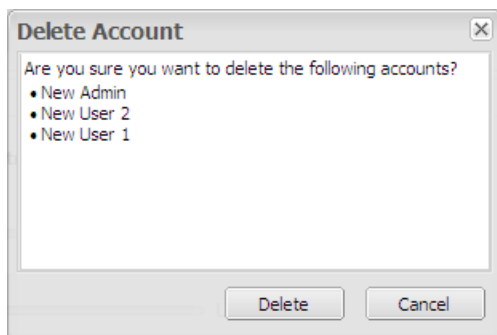

## 8.5 Database Maintenance

The Database Maintenance options available in Kiwi Syslog Web Access allow an Administrator to control the event database restrictions.

The event database in Kiwi Syslog Web Access can be configured for either Size-based or Age-based restriction.

### Maximum Database Size:

Specifies the maximum storage capacity that allowed for Kiwi Syslog Web Access.

When this size limit is reached, Kiwi Syslog Web Access will delete the oldest events (where the storage of these would exceed this limit).

eg. If the Maximum Database Size is configured as 4096MB, the event storage in Kiwi Syslog Web Access is implemented as a rolling 4096MB.

Acceptable values are in the range 256MB to 4096MB.


### Maximum Event Age:

Specifies the maximum event age that is allowed for Kiwi Syslog Web Access.

Events that are older than this will be deleted\*

Acceptable values are in the range 1 day to 365 days, and unlimited\*

**\*Maximum data storage capacity of Kiwi Syslog Web Access is 4096MB.**

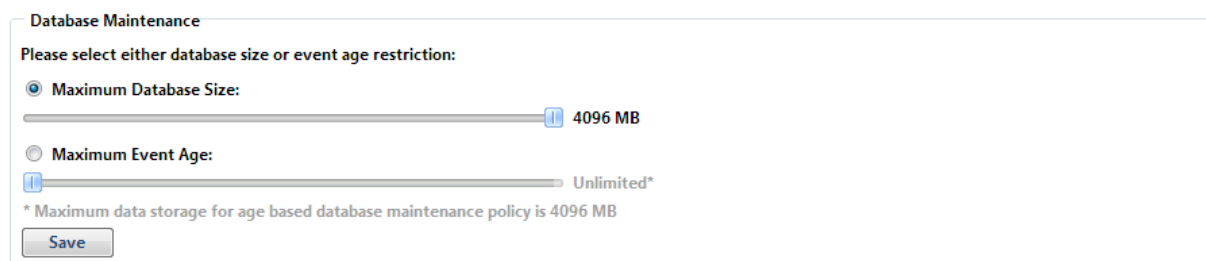

## 8.6 Website Configuration

The Website Configuration options available in Kiwi Syslog Web Access allow an Administrator to control the Session and Execution timeouts of ASP.NET

### Session Timeout:

Specifies the length of time a session can be idle before it is abandoned.

Acceptable values are in the range 30 minutes to 24 hours. The default session timeout is 8 hours.

### Execution Timeout:

Specifies the length of time a that a request is allowed to execute before being automatically shut down by ASP.NET.

This setting is particularly useful when you have a lot of event data and complex filters defined, that result in long-running queries.

Acceptable values are in the range 5 minutes to 60 minutes. The default execution timeout is 5 minutes.

#### Website Configuration Settings

Session Timeout: (Specifies the length of time a session can be idle before it is abandoned)

 8 hours

Execution Timeout: (Specifies the length of time that a request is allowed to execute before being automatically shut down by ASP.NET)


 5 minutes

 Save

**Note:** Making changes to these settings requires restarting the Web Server.

Server restart takes approx. 30 seconds to complete, during which time the website will be unable to service requests.

Applying new website configuration, please wait...

 10% completed